

**Series 2, Free-standing fridge-freezer
with freezer at bottom, 186 x 60 cm,
White, Total No Frost
KGN34NWEAG**



**No Frost bottomfreezer : no need to
defrost your freezer**

- **Multi Box:** ideal storage for fruits and vegetables.
- **No Frost:** never defrost again, thanks to perfect protection from ice formation - that saves time and effort.
- **Perfect Fit:** place your fridge right next to walls or other appliances to save space.
- **Multi Airflow System:** even air distribution for longer freshness.
- **LED Lighting:** all your items in perfect view.

Technical Data

Energy Efficiency Class ¹ :	 E
Average annual energy consumption in kilowatt hour per year (kWh/a):	 244 kWh/annum
Sum of volume of frozen compartments:	 107 l
Sum of volume of chill compartments:	 193 l
Airborne acoustical noise emissions :	 42 dB(A) re 1pW
Airborne acoustical noise emission class:	 D
Built-in / Free-standing:	 Freestanding
Door panel options:	 Not possible
Height:	 1860 mm
Width of the appliance:	 600 mm
Depth:	 660 mm
Net weight:	 62.7 kg
EAN code:	 4242005196722
Connection rating:	 100 W
Fuse protection:	 10 A
Door hinge:	 Right reversible
Voltage:	 220-240 V
Frequency:	 50 Hz
Length electrical supply cord:	 240 cm
Number of compressors:	 1
Number of independent cooling systems:	 1
Interior ventilator:	 No
Reversible Door Hinge:	 Yes
Number of Adjustable Shelves in fridge compartment:	 2
Shelves for Bottles:	 No
Frost free system:	 Fridge and freezer
Installation typology:	 Free-standing



¹ Scale of Energy Efficiency Classes from A to G

Series 2, Free-standing fridge-freezer with freezer at bottom, 186 x 60 cm, White, Total No Frost KGN34NWEAG

- Noise Level : 42 dB , EU19_Noise emission class_D: D
- Temperature rise time : EU19_Temperature rise time_D: 12 H

No Frost bottomfreezer : no need to defrost your freezer

-
- Cambered door, High-door design White

Design features

- White doors and white side panels
- Integrated horizontal handle
- Right hinged door, door reversible
- LED electronic control

Food freshness system

- 1 compressor

Key features - Fridge section

- 1 MultiBox - Transparent drawer with a rippled bottom, ideal for storing fruits and vegetables.
- MultiAirflow system - improves circulation of air around the fridge
- Bright interior LED fridge light in fridge section
- 4 safety glass shelves (2 height adjustable)
- Door shelves in fridge door: 1 large and 2 small.

Key features - Freezer section

- 3 freezer drawers
- SuperFreezing function with automatic deactivation
- Calendar frozen food
- Freezer malfunction warning signal: optical and acoustical warning system

Additional features

- Optical and acoustical
- 1 x ice cube tray

Dimension and installation

- Connection value 100 W
- 220 - 240 V
- Height adjustable front feet
- Dimensions: 186 cm H x 60 cm W x 66 cm D
- Based on the results of the standard 24-hour test. Actual consumption depends on usage/position of the appliance.
- To achieve the declared energy consumption, the distanceholders have to be used. As a result, the appliance depth increases by about 3.5 cm. The appliance used without the distance holder is fully functional, but has a slightly higher energy consumption.


Functions

Performance and Consumption

- EU19_EEK_D: E
- Total Volume : 300 l
- Net Fridge Volume : 193 l
- Net Freezer Volume : 107 l
- Freezing capacity 24h : 12 kg
- Annual Energy Consumption: 244 kWh/a
- Climate Class: SN-T
- EU19_Fast freezer facility_D


**Series 2, Free-standing fridge-freezer
with freezer at bottom, 186 x 60 cm,
White, Total No Frost
KGN34NWEAG**

Appliance name	a	b	c	d	e	f	g
KGN36 (Inner handle)	1860	600	660	590	600	1210	660
KGN36 (Outer handle)	1860	600	660	590	640	1210	700



Specification
a Height
b Width
c Depth with door closed, without handle
d Cabinet depth
e Width with door opened to 90°
f Depth with door opened
g Depth with door closed, with handle

measurements in mm

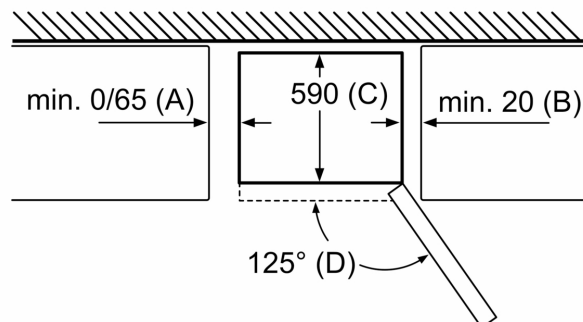

Appliance name	A	B	C	D
KGN33, 36, 39, 46, 49	0/65	20	590	125
KGF39, 49	0/65	20	590	125

Dimension A:
In models with vertical integrated handles,
in order to open easily, a minimum distance
of 65 mm is needed.

measurements in mm